

SG15/17/20RT

Multi-MPPT String Inverter for 1000 Vdc System



HIGH YIELD

- Lower startup & wider MPPT voltage
- Compatible with bifacial modules
- Built-in PID recovery function



SMART MANAGEMENT

- Smart IV curve scanning
- 24 / 7 Live monitoring
- Over-the-air firmware updates



SAFE AND DURABLE


- Quick arc fault circuit interrupter
- Build-in Type II DC & AC SPD
- High anti-corrosion rating C5




EASY AND USER FRIENDLY

- 21kg compact design
- Unique push-in connectors
- Fast and easy commissioning via App

CIRCUIT DIAGRAM

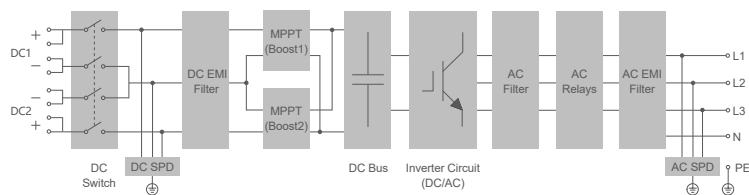

EFFICIENCY CURVE

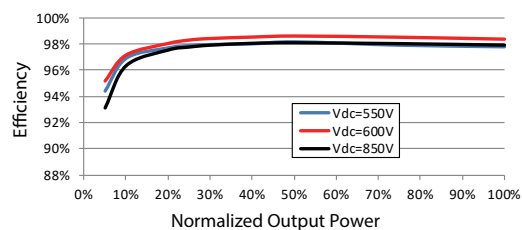

Type designation	SG15RT	SG17RT	SG20RT
Input (DC)			
Recommended max. PV input power	22.5 kWp	25.5 kWp	30 kWp
Max. PV input voltage		1100 V *	
Min. PV input voltage / Start-up input voltage		180V / 180V	
Rated input voltage		600 V	
MPP voltage range		160V-1000V	
No. of independent MPP inputs		2	
No. of PV strings per MPPT		2 / 2	
Max. PV input current		50 A (25 A / 25 A)	
Max. DC short-circuit current		64 A (32 A / 32 A)	
Max. current for DC connector		30 A	
Output (AC)			
Rated AC output power	15000 W	17000 W	20000 W
Max. AC output apparent power	16500 VA**	18700 VA**	22000 VA**
Rated AC output apparent power	16500 VA**	18700 VA**	22000 VA**
Max. AC output current	25 A	28.3 A	31.9 A
Rated AC output current(at 230V)	21.7 A	24.6 A	29 A
Rated AC voltage		3 / N / PE, 220 / 380 V 3 / N / PE, 230 / 400 V 3 / N / PE, 240 / 415 V	
AC voltage range		180V – 276V / 311V - 478V	
Rated grid frequency		50 Hz / 60 Hz	
Grid frequency range		45 – 55 Hz / 55 – 65 Hz	
Harmonic (THD)		<3 % (at rated power)	
Power factor at Rated power / Adjustable power factor		>0.99/0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases		3 / 3	
Efficiency			
Max. efficiency		98.5%	
European efficiency		98.1%	
Protection&Function			
Grid monitoring		Yes	
DC reverse connection protection		Yes	
AC short-circuit protection		Yes	
Leakage current protection		Yes	
Surge Protection		DC Type II / AC Type II	
Ground fault monitoring		Yes	
DC switch		Yes	
PV String current monitoring		Yes	
Arc fault circuit interrupter (AFCI)		Yes	
PID recovery function		Yes	
General Data			
Dimensions (W*H*D)		370*480*195 mm	
Weight		21 kg	
Mounting method		Wall-mounting bracket	
Topology		Transformerless	
Degree of protection		IP65	
Night power consumption		< 6 W	
Corrosion		C5	
Operating ambient temperature range		-25 °C to 60 °C	
Allowable relative humidity range (non-condensing)		0% – 100%	
Cooling method		Smart forced air cooling	
Max. operating altitude		4000 m	
Display		LED	
Communication		WLAN / Ethernet / RS485 / DI / DO	
DC connection type		MC4 (Max. 6 mm ²)	
AC connection type		Plug and play	
Grid Compliance		IEC / EN 61000-6-1/2/3/4, IEC 61000-3-2/3/11/12, IEC / EN62109-1/2, IEC 61727, IEC 62116, IEC 61683, IEC 60068-2-1/2/14/30/64/27, IEC TS 62910 , EN50530, AS/NZS 4777.2:2020, VDE-AR-N-4105, DIN VDE0126-1-1/A1, EN50549-1, DEWA, VFR 2019, UTE C15-712-1, PSE NC RfG, UNE 206006/7 IN, MEA/PEA, G98, UNE 217002:2020, NTS V2 TypeA	
Grid Support		LVRT, HVRT, active & reactive power control and power ramp rate control	

*: The inverter enters the standby state when the input voltage ranges between 1,000V and 1,100V. If the maximum DC voltage in the system can exceed 1000V, the MC4 connectors included in the scope of delivery must not be used. In this case MC4 Evo2 connectors must be used.

** For Germany, max. AC output power: SG15RT is 15000VA, SG17RT is 17000VA, SG20RT is 20000VA.

SG5.0/6.0/7.0/8.0/10/12RT

Multi-MPPT String Inverter for 1000 Vdc System



HIGH YIELD

- Lower startup & wider MPPT voltage
- Compatible with bifacial modules
- Built-in PID recovery function

SMART MANAGEMENT

- Smart IV curve scanning
- 24 / 7 Live monitoring
- Remote firmware updates


SAFE AND DURABLE

- Quick arc fault circuit interrupter
- Build-in Type II DC & AC SPD
- High anti-corrosion rating C5


EASY AND USER FRIENDLY

- 18 kg compact design
- Unique push-in connectors
- Fast and easy commissioning via App

CIRCUIT DIAGRAM(SG10RT)

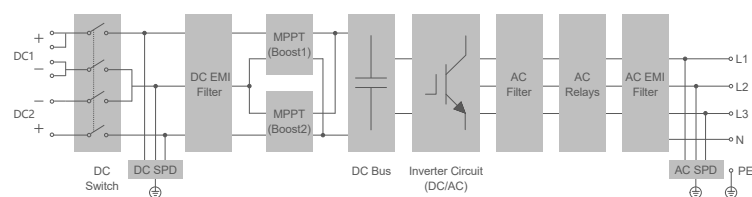

EFFICIENCY CURVE

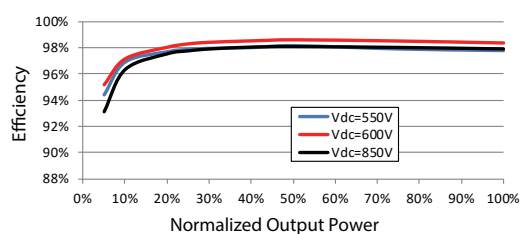

Type designation	SG5.0RT	SG6.0RT	SG7.0RT	SG8.0RT	SG10RT	SG12RT
Input (DC)						
Recommended max. PV input power	7.5 kWp	9.0 kWp	10.5kWp	12 kWp	15 kWp	18 kWp
Max. PV input voltage	1100 V *					
Min. PV input voltage / Start-up input voltage	180V / 180V					
Rated input voltage	600 V					
MPP voltage range	160 V – 1000 V					
No. of independent MPP inputs	2					
No. of PV strings per MPPT	1 / 1	1 / 1	2 / 1	2 / 1	2 / 1	2 / 1
Max. PV input current	25 A (12.5 A / 12.5 A)		37.5 A (25 A / 12.5 A)			
Max. DC short-circuit current	32 A (16 A / 16 A)		48 A (32 A / 16 A)			
Max. current for DC connector	30 A					
Output (AC)						
Rated AC output power	5000 W	6000 W	7000 W	8000 W	10000 W	12000 W
Max. AC output apparent power	5500 VA**	6600 VA**	7700 VA**	8800 VA**	11000 VA**	13200 VA**
Rated AC output apparent power	5500 VA**	6600 VA**	7700 VA**	8800 VA**	11000 VA**	13200 VA**
Max. AC output current	8.3 A	10 A	11.7 A	13.3 A	16.7 A***	20 A
Rated AC output current(at 230V)	7.2 A	8.7 A	10.1 A	11.6 A	14.5 A	17.4 A
Rated AC voltage	3 / N / PE, 220 / 380 V 3 / N / PE, 230 / 400 V 3 / N / PE, 240 / 415 V					
AC voltage range	180V – 276V / 311V - 478V					
Rated grid frequency	50 Hz / 60 Hz					
Grid frequency range	45 – 55 Hz / 55 – 65 Hz					
Harmonic (THD)	<3 % (at rated power)					
Power factor at Rated power / Adjustable power factor	>0.99/0.8 leading – 0.8 lagging					
Feed-in phases / Connection phases	3 / 3-PE					
Efficiency						
Max. efficiency	98.40%	98.40%	98.40%	98.50%	98.50%	98.50%
European efficiency	97.40%	97.40%	97.70%	97.80%	97.90%	97.90%
Protection&Function						
Grid monitoring	Yes					
DC reverse connection protection	Yes					
AC short-circuit protection	Yes					
Leakage current protection	Yes					
Surge Protection	DC Type II / AC Type II					
Ground fault monitoring	Yes					
DC switch	Yes					
PV String current monitoring	Yes					
Arc fault circuit interrupter (AFCI)	Yes					
PID recovery function	Yes					
General Data						
Dimensions (W*H*D)	370*480*195 mm					
Weight	18 kg					
Mounting method	Wall-mounting bracket					
Topology	Transformerless					
Degree of protection	IP65					
Night power consumption	< 6 W					
Corrosion	C5					
Operating ambient temperature range	-25 °C to 60 °C					
Allowable relative humidity range (non-condensing)	0% – 100%					
Cooling method	Natural cooling					
Max. operating altitude	4000 m					
Display	LED					
Communication	WLAN / Ethernet / RS485 / DI / DO					
DC connection type	MC4 (Max. 6 mm²)					
AC connection type	Plug and play					
Grid Compliance	IEC / EN 61000-6-1/2/3/4, IEC 61000-3-2/3/11/12, IEC / EN62109-1/2, IEC 61727, IEC 62116, IEC 61683, IEC 60068-2-1/2/14/30/64/27,IEC TS 62910 , EN50530, AS/NZS 4777.2:2020, VDE-AR-N-4105, DIN VDE0126-1-1/A1, EN50549-1, DEWA, VFR 2019, UTE C15-712-1, PSE NC RfG, UNE 206006/7 IN, MEA/PEA, G98, UNE 217002:2020, NTS V2 TypeA					
Grid Support	LVRT, HVRT,active & reactive power control and power ramp rate control					

*: The inverter enters the standby state when the input voltage ranges between 1,000V and 1,100V. If the maximum DC voltage in the system can exceed 1000V, the MC4 connectors included in the scope of delivery must not be used. In this case MC4 Evo2 connectors must be used.

** For Germany, max. AC output power: SG5.0RT is 5000VA, SG6.0RT is 6000VA, SG7.0RT is 7000VA, SG8.0RT is 8000VA, SG10RT is 10000VA, SG12RT is 12000VA.

*** For Jordan, max. AC output current: SG10RT is 16 A.